


DMT 85/7 E

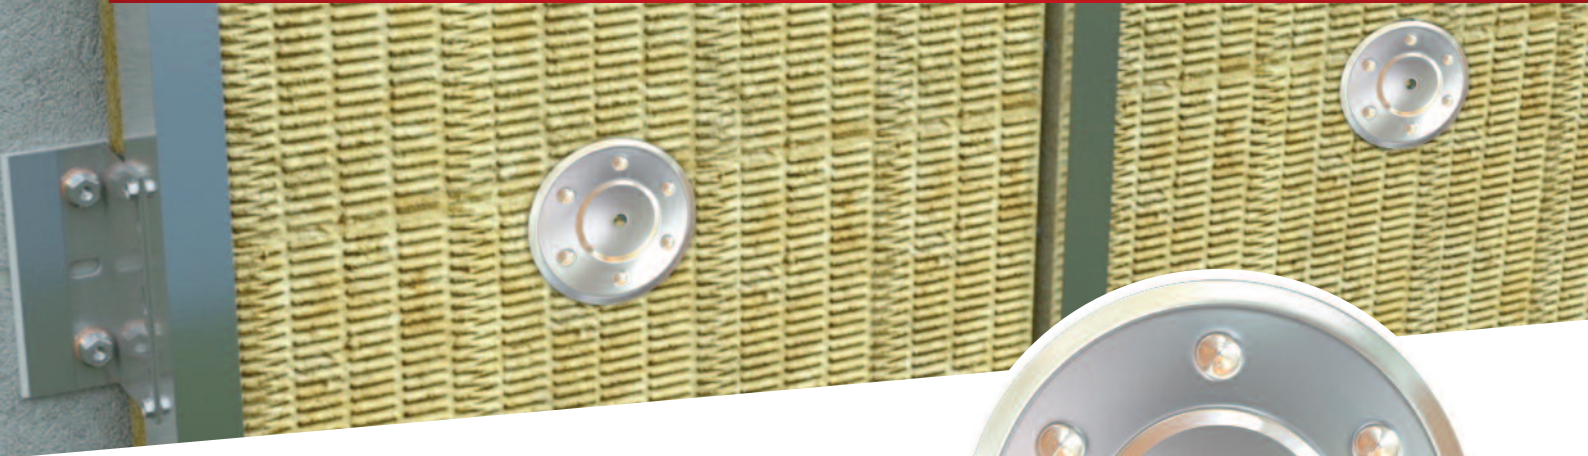

Application:

For installation of mineral wool insulation slab to light steel framing, timber studs and CP board.

Material:

High quality stainless steel grade 304 St/St, ISO Group A2. Din Werkstoff 1.4301

Outer Diameter	Inner Diameter	Thickness
85.0mm	7.0mm	0.5mm



Details shown on this data sheet are supplied from our Applitec laboratory in accordance with current industry standards. Information supplied should form part of a general guide and should performance data for a specific application be required please do not hesitate to contact us.

EJOT UK Ltd, Hurricane Close,
Sherburn-in-Elmet, Leeds LS25 6PB.

Tel: 01977 687040

Fax: 01977 687041

Email: info@ejot.co.uk