

Facade screws

For rear ventilated facades (VHF)



EJOT® stainless steel SAPHIR self-drilling screw JT4-FR-2H/6-4.8



Length [mm]	 [mm]		Order description	Article number
Self-drilling screw				
22	6	1,000	JT4-FR-2H/6-4.8x22*	7 384 170 300
Centring bush				
-	-	500	Centring bush	3 010 003 700

*JT9 made of A4 stainless steel upon request

Application range

- Fastener for ALUCOBOND® external wall cladding according to Z-33.2-6
- For fastening without forcing tension to 2 mm aluminium substructures

Characteristics

- Stainless A2
- With centring bush to form floating points

Benefits


- Centred drilling and simultaneous fastening of the boards to the substructure
- No pre-drilling of the substructure

Notice

We recommend the tapered special bit TORX® T25W-1/4"/Cx25 for force fit in the fastener head. To form fixed points, we recommend pre-drilling a Ø 4.0 mm hole in the panel.

Technical Specifications

Diameter	4.8 mm
Drilling capacity $t_1 + t_2$	1.0 + 3.0 mm
Drive	Hexalobular drive T25
Ø drill hole centring bush	8.0 mm

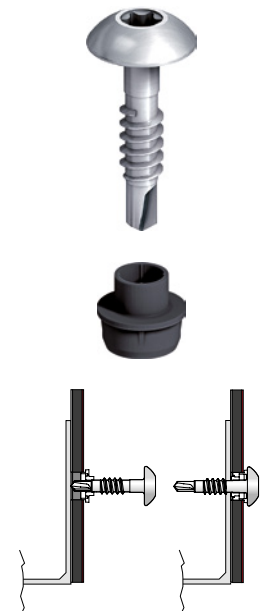

Cross references

Bit T25W-1/4"x25
Cordless screwdriver ASCS 6.3